

Master LV current ratings

Master LV 150A

Continuous current : 150 A

Intermittent Current Rating:


30% Duty : 275 A

40% Duty : 235 A

50% Duty : 210 A

60% Duty : 195 A

70% Duty : 180 A

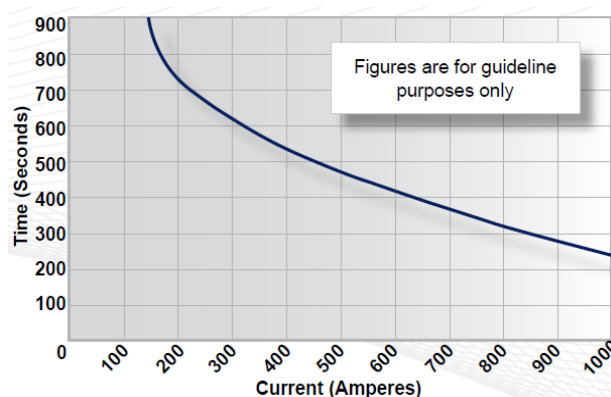

Master LV 400A

Continuous current : 400 A

Intermittent Current Rating:


30% Duty : 730 A

40% Duty : 630 A

50% Duty : 585 A

60% Duty : 515 A

70% Duty : 480 A

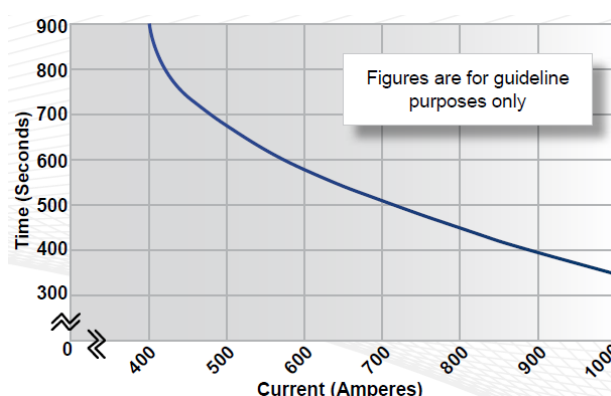

Master LV 600A

Continuous current : 600 A

Intermittent Current Rating:


30% Duty : 1095 A

40% Duty : 950 A

50% Duty : 850 A

60% Duty : 775 A

70% Duty : 715 A

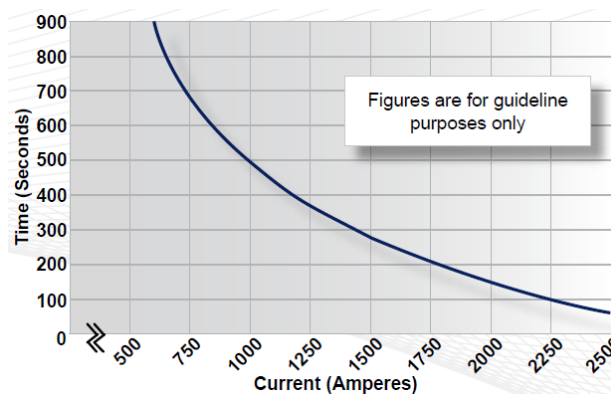

Master LV 1000A

Continuous current : 1200A

Intermittent Current Rating:

30% Duty : 2190 A

40% Duty : 1895 A

50% Duty : 1695 A

60% Duty : 1550 A

70% Duty : 1435 A

